Industrial Packaging Films Product Portfolio



About the **IPAK Group**

Headquartered in Karachi, IPAK was founded in 2017 as a green field project to manufacture "BOPP" packaging films. The company's state-of-the-art manufacturing facility is spanning over an area of ~7 acres land, where the major machinery has been acquired from the world's top class engineering firms such as Bruckner Maschinenbau (Germany), BOBST (United Kingdom), KAMPF (Germany), etc.

IPAK is a budding yet high growth potential company with a focus to develop and deliver excellent quality packaging films to the local as well as international markets.

Staying committed to its unwavering strategic objectives, the company decided to expand its business footprint, by incorporating three new subsidiaries which will enable the group to become the only flexible packaging group of Pakistan, offering a one-window solution for all four kinds of commonly used packaging films known as BOPP, BOPET, CPP and Metallized.





Product Portfolio

Transparent Films

Range includes films with high transparency and gloss, low SIT, wide seal range, modified slip and primarily used for printing and lamination.

Cavitated/Pearlized Films

Beside improved aesthetics and light barrier, these films being low density, thus, high yield, provide significant cost advantage to the brand owners.



Transparent Films

TC20 | Previous CG44H

Transparent, both sides heat sealable film for Tobacco overwrap


Transparent, both sides heat sealable, one side treated for Soap wrap

Properties	Units	Values
Thickness	μ	20.00
Grammage	gm/m ²	18.20
Yield	m²/kg	54.95
Density	g/cm ³	0.91



TS21C | Previous THo-SG

Properties	Units	Val	ues	
Thickness	μ	20.00	40.00	
Grammage	gm/m ²	18.20	36.40	
Yield	m²/kg	54.95	27.45	
Density	g/cm ³	0.	.91	



TT01 | Previous TNoT

Transparent, non-heat sealable, one side treated for Adhesive Tape

Properties	Units	Val	ues
Thickness	μ	23.00	25.00
Grammage	gm/m ²	20.93	22.75
Yield	m²/kg	47.80	43.95
Density	g/cm ³	0.	91







TC20A Prev	ious CG99	N Transparent, both sides h film for Tobacco bundle o
Properties	Units	Values
Thickness	μ	23.00
Grammage	gm/m ²	20.93
Yield	m²/kg	47.80
Density	g/cm ³	0.91





heat sealable overwrap



 Outside Sealable layer
Intermediate layer 1 Core layer Intermediate layer 2 Inside Sealable layer



Cavitated/Pearlized Films

OS21C | Previous PRL-SG

Cavitated, both sides heat sealable one side treated for Soap wrap

Properties	Units	Values	
Thickness	μ	25.00	
Grammage	gm/m ²	18.00	
Yield	m²/kg	55.55	
Density	g/cm ³	0.91	






Modified Intermediate layer 2 Modified Intermediate layer 1 Treated Sealable laver Cavitated Core layer Non-Treated Sealable layer





Our Subsidiaries

PETRAK ELLMS (DVT.) LIMITED GLOBAL PACKAGING ELLMS (PVT) LIMITED

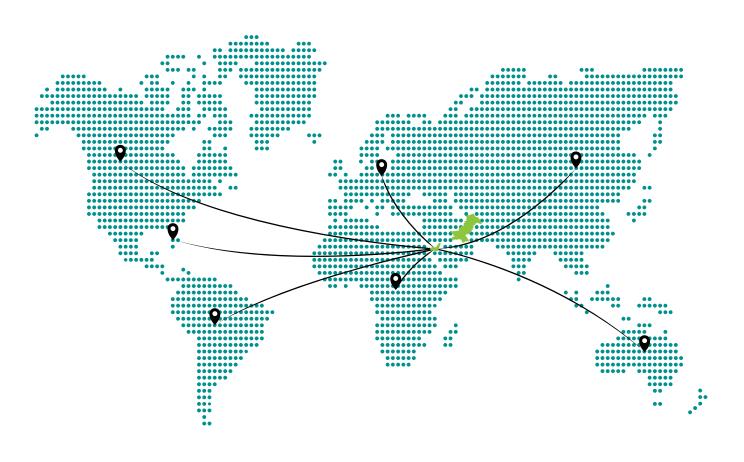











www.ipak.com.pk

